

NORDIC FIBERGLASS, INC.
Warren, MN 56762

Ground Sleeve Cover

DRAWN: 7/12/88

DWG. NO. GSC-25-15:MG

SCALE: 1:6



WEIGHT:

SHEET 1 OF 1

Drawn By: M.H. 3/95

Date	Appv'd by	Description

The GSC-25-15 is fabricated from one layer of 1/2" CDX Mill Certified Exterior Plywood. This is then encapsulated in fiberglass using a fire retardent polyester resin and chopped glass. The exterior is then completely covered with gel-coat for potection from UV light. Two brass penta-head recesses are installed for securing to box pad. Comes with two 3/8" SST penta-head bolts for fastening.

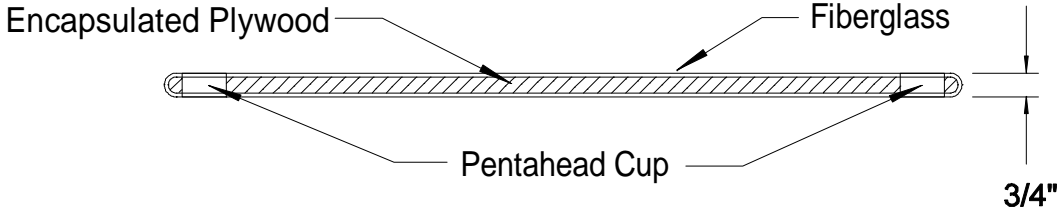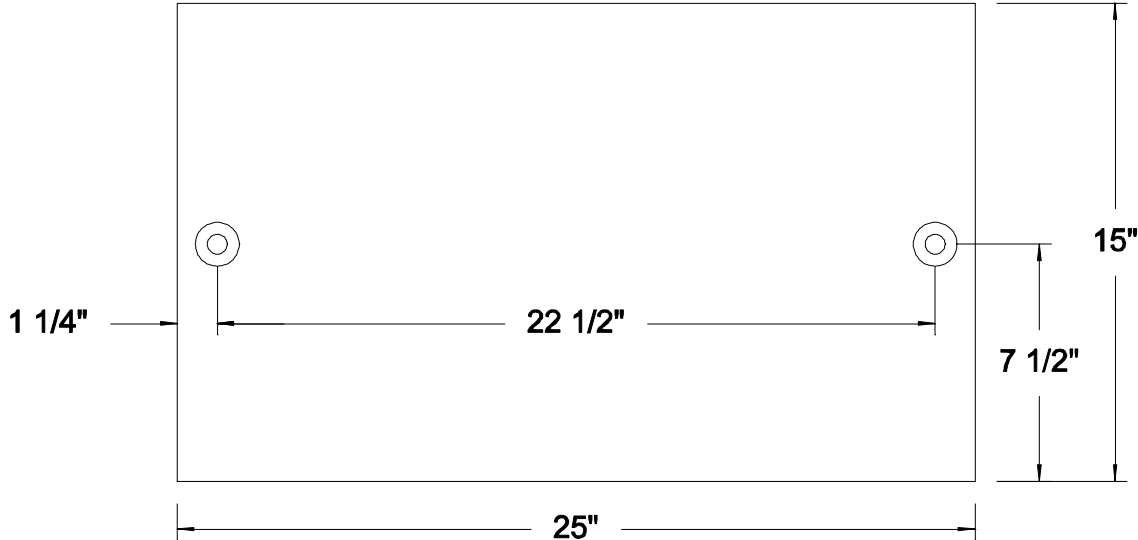

NOTICE: This document and all of the information, data, and designs thereon are the property of Nordic Fiberglass, Inc. Consent for the retention and use of this document is granted to persons other than Nordic Fiberglass, Inc. only on the conditions that the document and all of its contents will be held in strict confidence. This document is not to be reproduced in whole or in part for manufacture or procurement from sources other than Nordic Fiberglass, Inc. without the written permission of Nordic Fiberglass, Inc.