




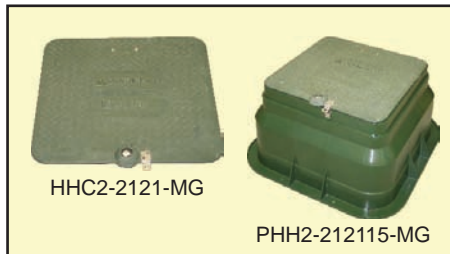

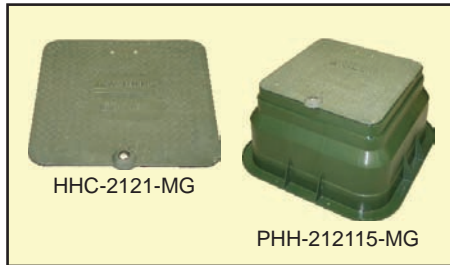

# NORDIC FIBERGLASS, INC.

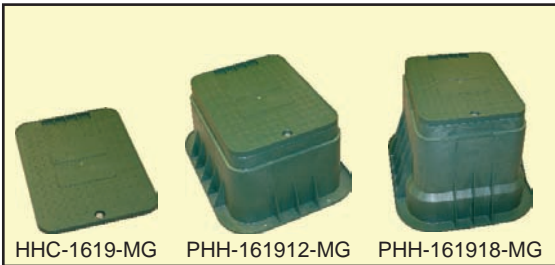

Nordic Products	L x W x H	Top Opening	Description
GSHH-25-16-16M-MG-21x12	25 x 16 x 16	21 x 12	Base w- flat cover
GSHH-251918-MG-19x13	25 x 19 x 18	19 x 13	Base w- flat cover
GSHH-301818-MG-24x12	30 x 18 x 18	24 x 12	Base w- flat cover
GSHH-372318-MG-31x17	37 x 23 x 18	31 x 17	Base w- flat cover
HHC-1619-MG	16 x 19	N-A	Flat cover only
HHC-2121-MG	21 x 21	N-A	Flat cover only
HHC2-1619-MG	16 x 19	N-A	Flat cover only, 2 Lock
HHC2-2121-MG	21 x 21	N-A	Flat cover only, 2 Lock
PHH-161912-MG	16 x 19 x 12	12 x 16	Base w- flat cover
PHH-212115-MG	21 x 21 x 15	18 x 18	Base w- flat cover
PHH-161918-MG	16 x 19 x 18	12 x 16	Base w- flat cover
PHH2-161912-MG	16 x 19 x 12	12 x 16	Base w- flat cover, 2 Lock
PHH2-161918-MG	16 x 19 x 18	12 x 16	Base w- flat cover, 2 Lock
PHH2-212115-MG	21 x 21 x 15	18 x 18	Base w- flat cover, 2 Lock

GSHH-ground sleeve hand hole, HHC-hand hole cover, HHC2-hand hole cover with double lock, PHH-plastic hand hole, PHH2-plastic hand hole with double lock.

## Plastic Hand Holes Features:

- RUS accepted.
- Plastic hand holes are made from copolymer polypropylene.
- The Munsell green pigment is blended throughout the material, which contains UV stabilizer for weather-ability.
- Units include a flat cover that is compression molded fiberglass.
- The fiberglass cover can be removed by removing the 3/8" pentahead bolt.
- Hand Holes are designed for flush burial.
- "ELECTRIC" is imprinted on standard cover.
- Customized lettering on cover available upon request.

## Fiberglass Hand Holes

### Features:

- Fiberglass ground sleeve hand holes are designed for flush burial.
- These ground sleeves are produced of fire retardant resin and a combination of chopped glass spray-up and hand layup using 18 oz woven roving glass reinforcement for a 1/4" fiberglass nominal thickness throughout the part.
- The exterior is covered with a Munsell Green gel-coat, which contains UV stabilizer for superior weather-ability.
- M-Medium Weight, 3/16" thick nominal fiberglass thickness.



GSHH-25-16-16M-MG-21x12

